



Contract Interior 649

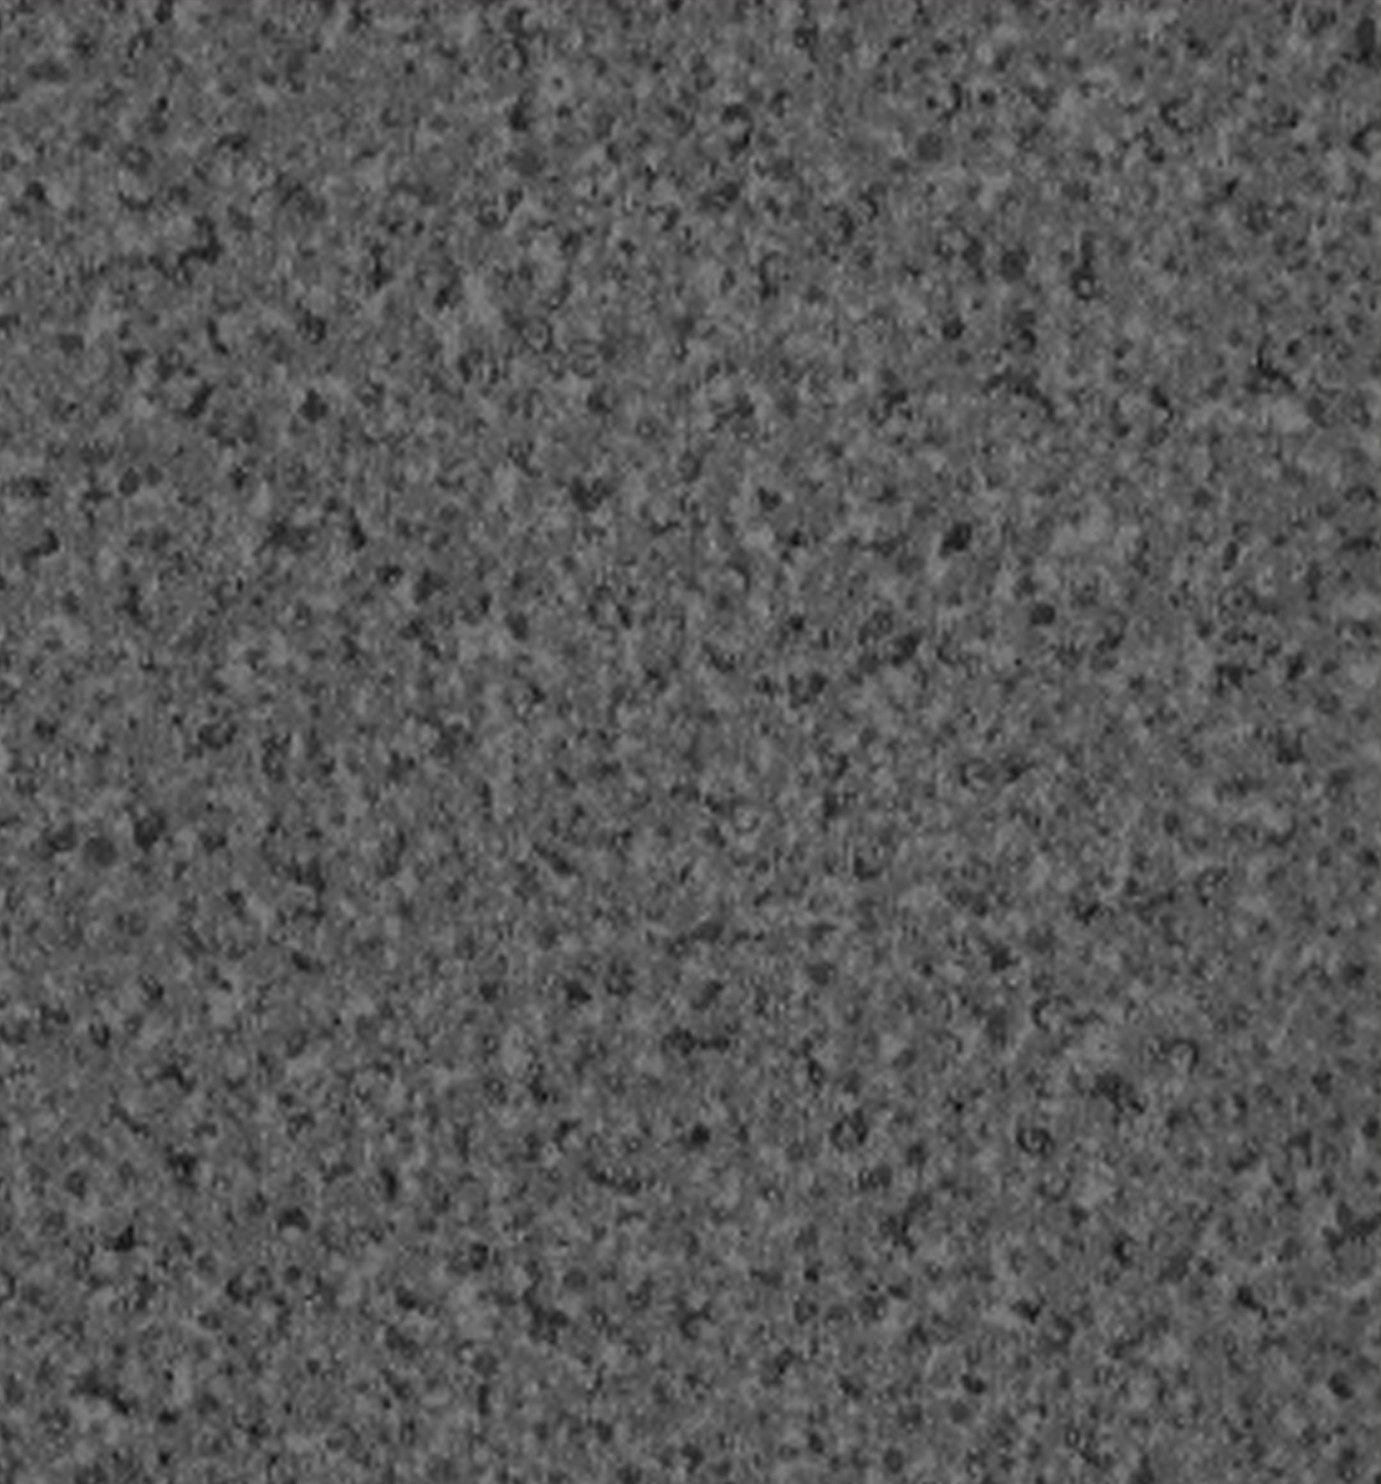

LECA FLOR
CARPETS

30 YEARS OF PRODUCT AND SERVICE EXCELLENCE

Contract Interior 649

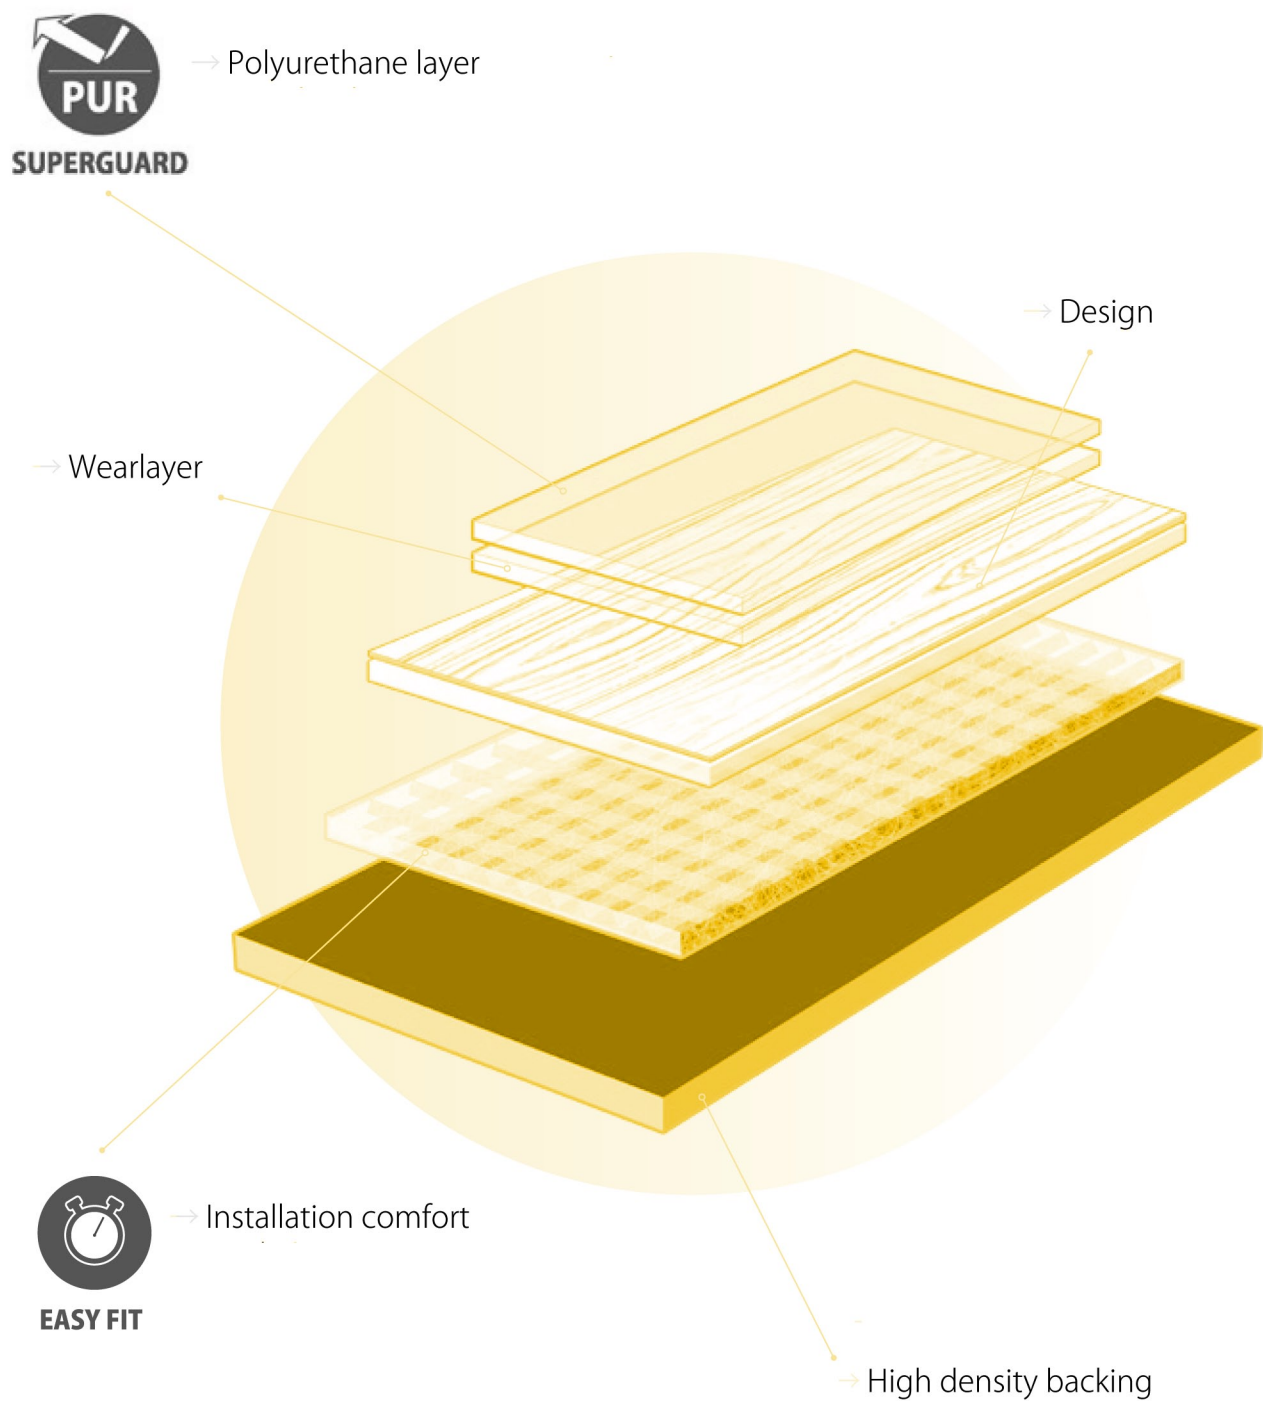

SOURCED FROM FSC APPROVED FORESTS.



30 YEARS OF PRODUCT AND SERVICE EXCELLENCE

Contract Interior 649



PRODUCT INFORMATION

Level of use	EN 685	23 - 34 - 43
Total thickness	EN 428	2,00 mm
Wear layer	EN 429	0,70 mm
Wear layer PUR treatment		Superguard
Total weight/m²	EN 430	ca. 2.758 g
Heterogeneous PVC		EN 649

SIZE & PACKING | DIMENSIONS & EMBALLAGE

Width Largeur	EN 426	2 - 4 m
Standard Length	EN 426	ca. 25 m
Weight of standard roll		ca. 142 - 284 kg

TEST RESULTS | PERFORMANCES TECHNIQUES

Inflammability	EN 13501	Bfl-S1
Slip resistance	EN 13893	DS
Slip restraint	DIN 51130	R10
Residual indentation	EN 433	≤ 0,10 mm
Furniture leg resistance	EN 424	Very good
Curling Incurvation	EN 434	≤ 8 mm
Electrical resistance	EN 1081	10 ⁹ Ohm
Static electrical propensity	EN 1815	<2kV
Dimensional stability	EN 434	0,05%
Heat insulation	ISO 8302	0,0108 m².K/W
Abrasion group	EN 660-2	Groupe T
Fomaldehyde group	EN 717-1	E1
Acoustic insulation	ISO 717-1	ΔLw 7 dB
Castor chair resistance	EN 425	Very good
Light fastness	ISO 105B02	6
Underfloor heating	EN 12524	Suitable
Resistance to chemicals	EN 423	Very good
Hot welding		Welding rods on demand
Warranty (year)		5



EN 14041 : 2004
06



SOURCED FROM FSC APPROVED FORESTS.



30 YEARS OF PRODUCT AND SERVICE EXCELLENCE