

Sucupira

Solid Hardwood Planks



LECA FLOR
CARPETS

30 YEARS OF PRODUCT AND SERVICE EXCELLENCE

Technical Specification Sheet

Board Width	120/180mm wide
Length	Random lengths
Thickness	15 mm
Construction	Micro bevelled edges alongside. Machine T&G, head ends matched.
Finish	Pre-sanded
End Use	Commercial
Quality	Select
Density	1000 / 1020 Kg/m ³ (Heavy wood)
Dimensional Stability	Good
Fitting	Fully adhered using approved wood flooring adhesive, such as F Ball B92, B93 or B95. A DPM is imperative on all new builds. Moisture readings of the rh of both the floor and air must be taken and retained. To be fitted in accordance with BS8201.
Important	Prior to handover the flooring installation should be cleaned using Parquet Cleaner and finished with two coats of 3032 Satin Hardwax Oil or similar approved.
Country of Origin	Brazil – Certified Sustainable Forests
Areas Of Use	BMW Café/Customer Waiting Area




SOURCED FROM FSC APPROVED FORESTS.

LECA FLOR
CARPETS

30 YEARS OF PRODUCT AND SERVICE EXCELLENCE

Technical Specification Sheet

CROSS SECTION LENGTHWAYS SHOWING BOARD ENDS

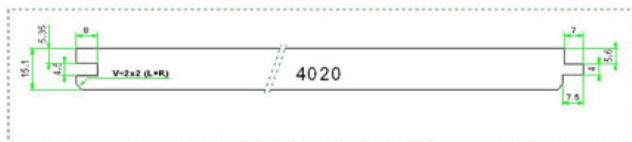

CROSS SECTION THROUGH BOARD WIDTHWAYS



SOURCED FROM FSC APPROVED FORESTS.

LECA FLOR
CARPETS

30 YEARS OF PRODUCT AND SERVICE EXCELLENCE